


Feature :

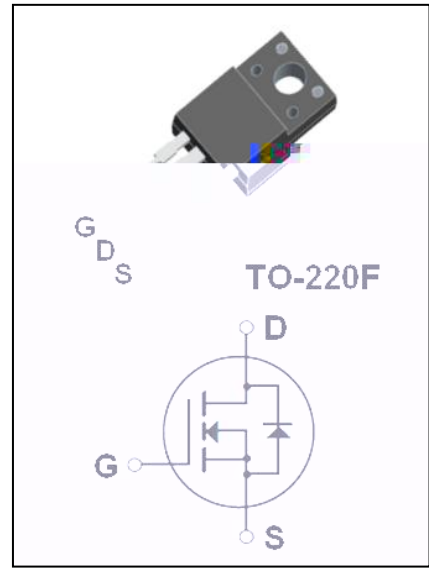

Application :

Maximum Ratings


| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

*


Thermal Characteristics

| | | |
|--|--|--|
| | | |
| | | |
| | | |


O -Regi Cha ac e i ic

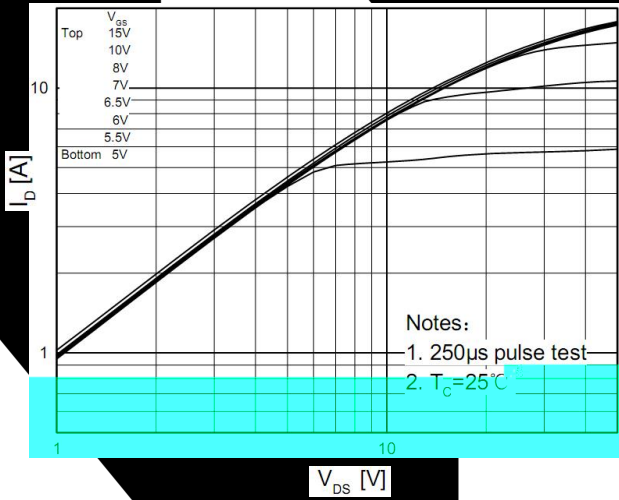


T a f e Cha ac e i ic

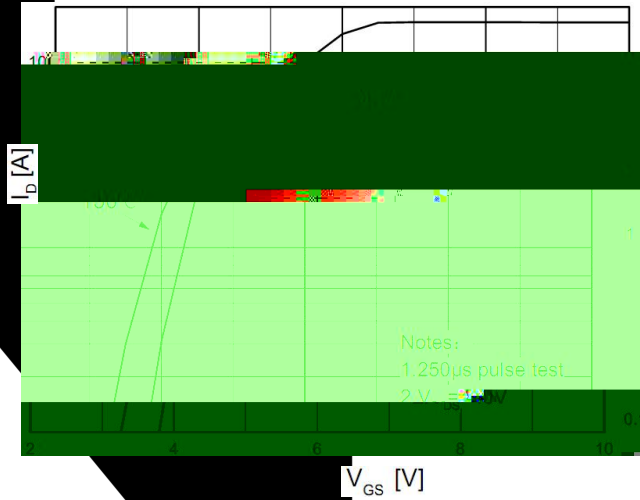


V I age l

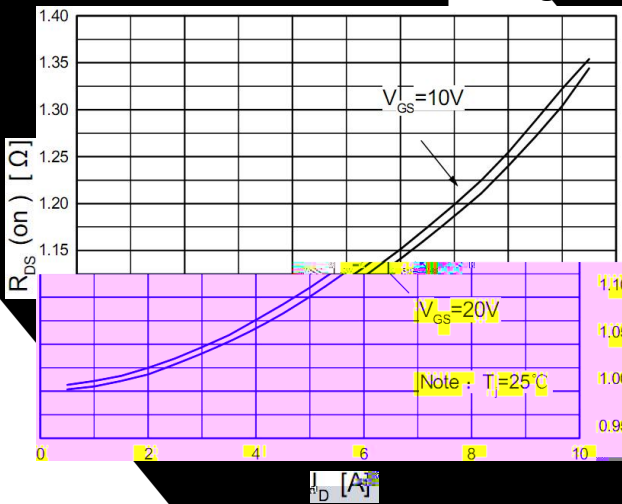


B d e V I age V a i i e

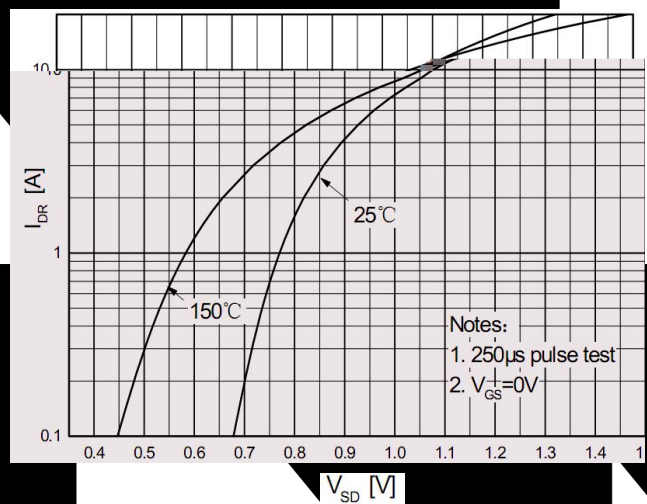



Ca

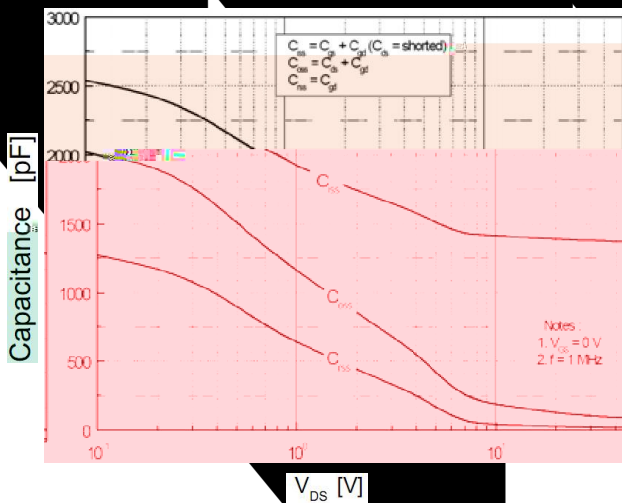


Ga e Cha ge Ch

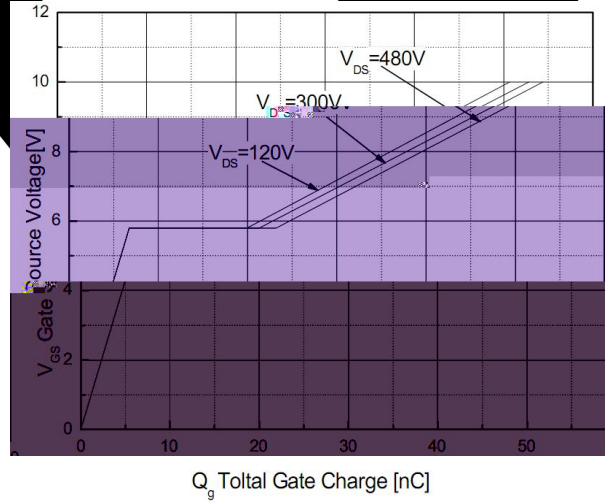

Breakdown Voltage vs. Temperature **On-Resistance vs. Temperature**

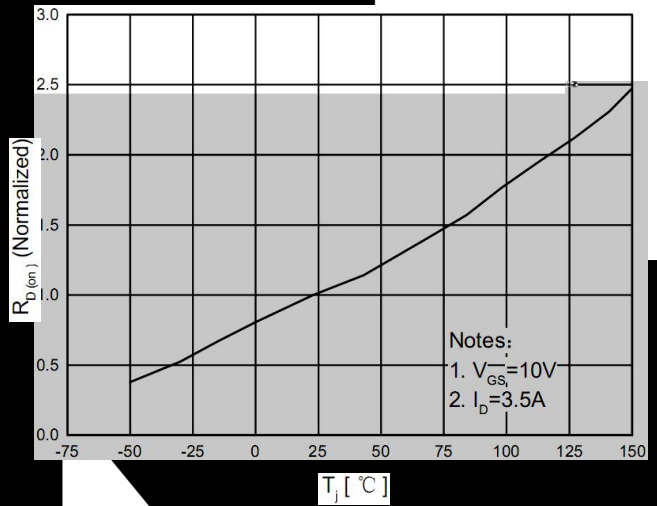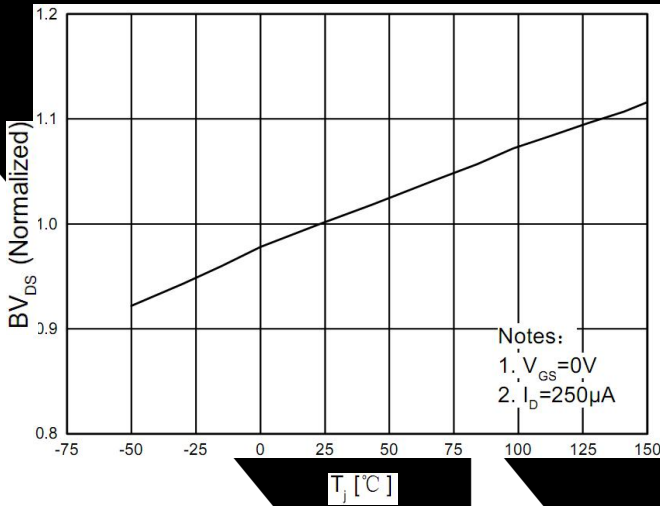

Maximum Safe Operating Area

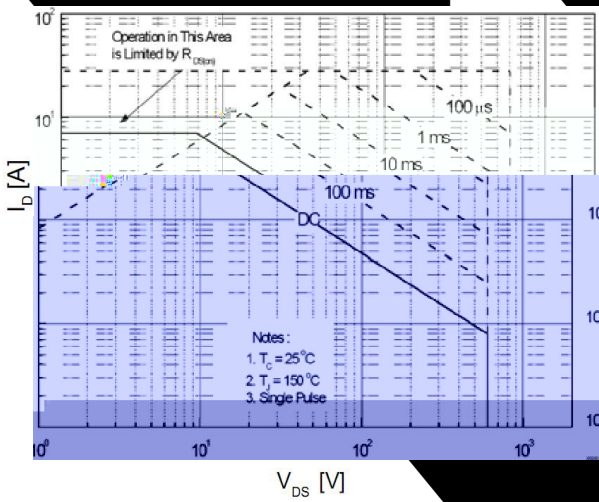

TO-220F Package Dimensions

:

