


Elec tical Cha a e i ic

Off Cha a e i ic						
△			○			○
△						
			○			
O Cha a e i ic						
D amic Cha a e i ic						
S i chi g Cha a e i ic						
D ai -S e Di de Cha a e i ic a d Ma im m Ra i g						


、
、
、
、
、
、

○ ○
○


O -Regi Cha aç e i ic

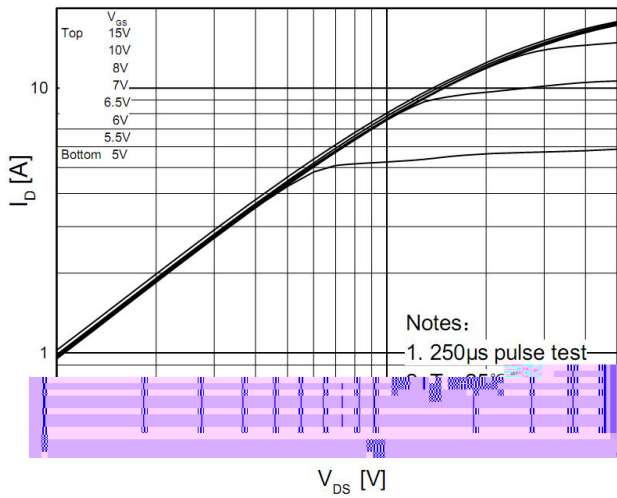


T a fe Cha aç e i ic

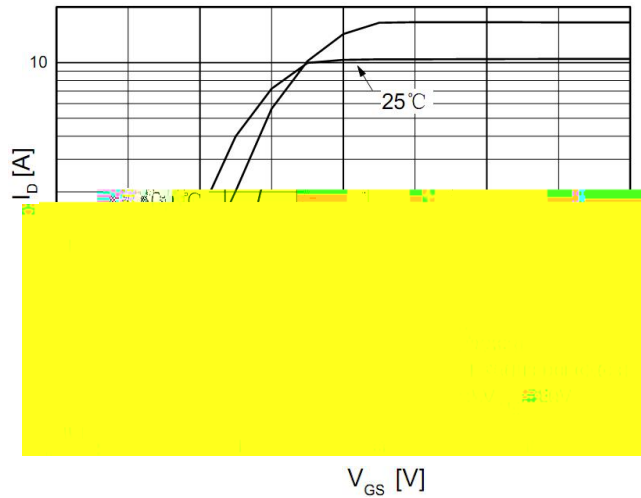


O -Re i a ce Va i a i .
D a i C e a d Ga e V l a g e

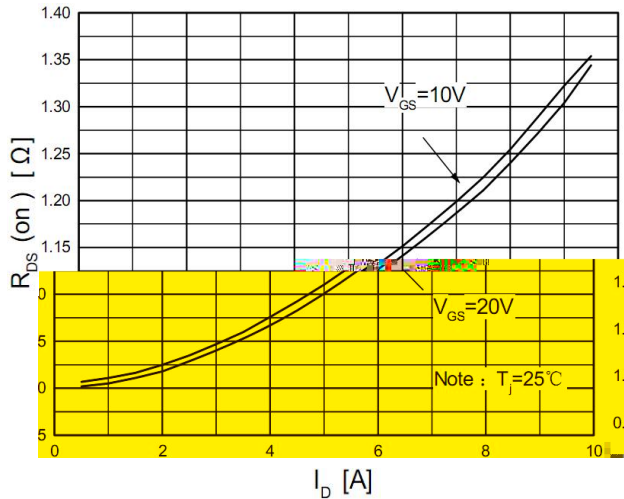


B d Di de F a d V l a g e Va i a i .
. S ce C e a d Tem e a e

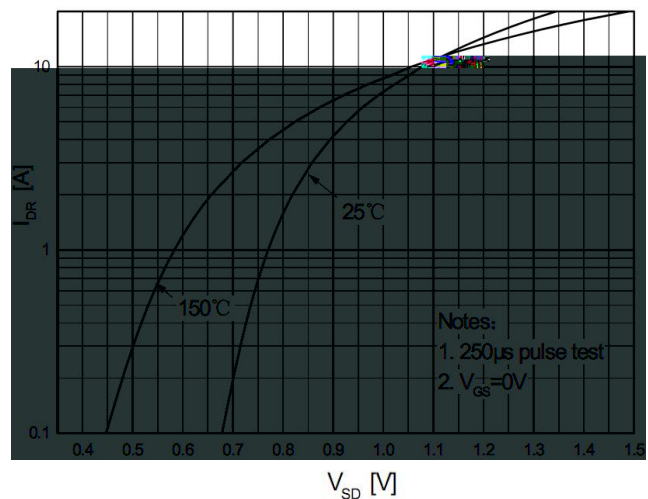


Ca aci a ce Cha aç e i ic

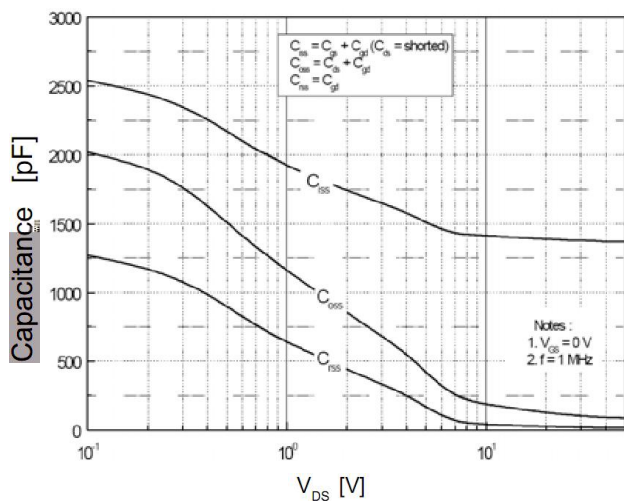


Ga e Cha ge Cha aç e i ic

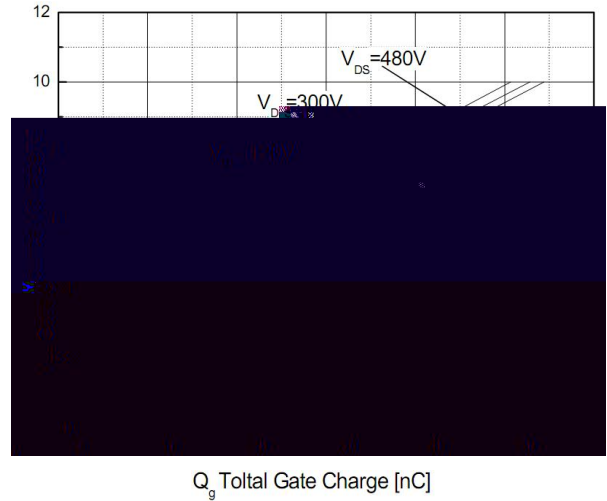


Breakdown Voltage vs. Temperature

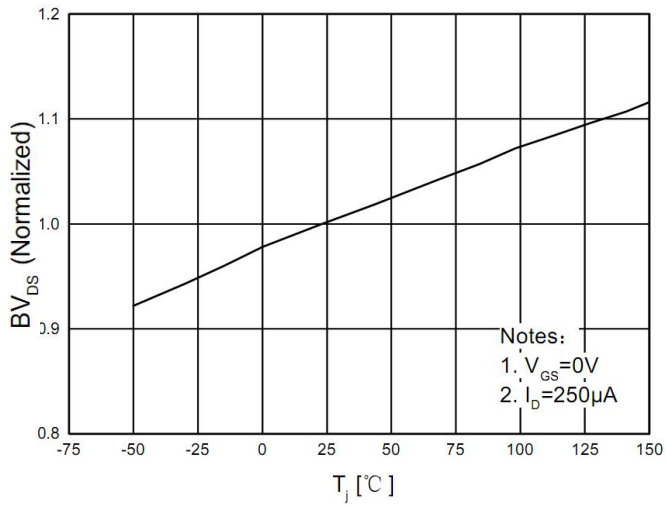


On-Resistance vs. Temperature

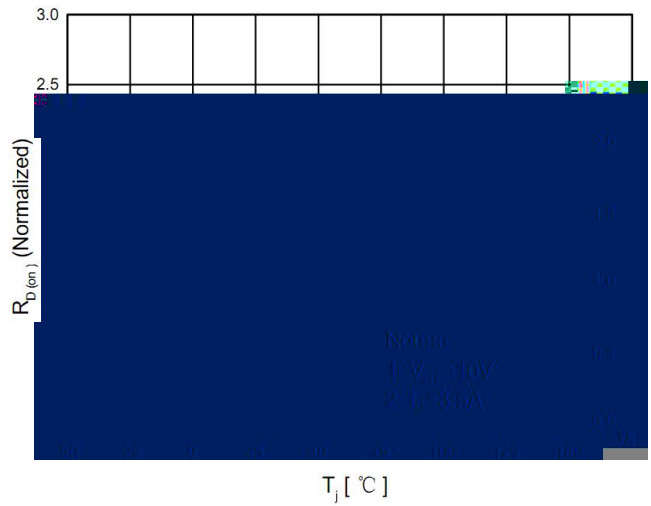

Maximum Safe Operating Area

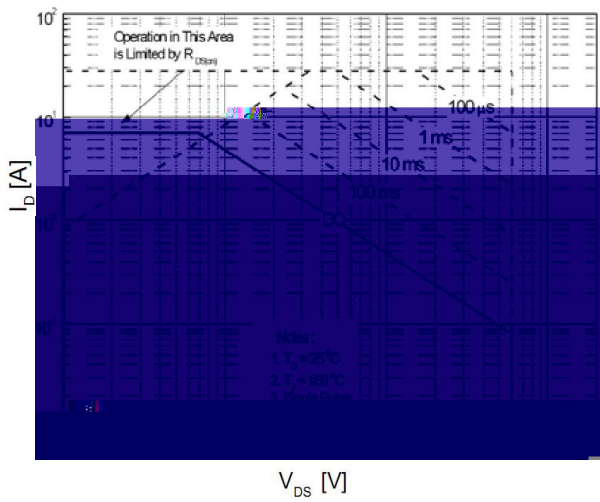

Maximum Drain Current vs. Temperature

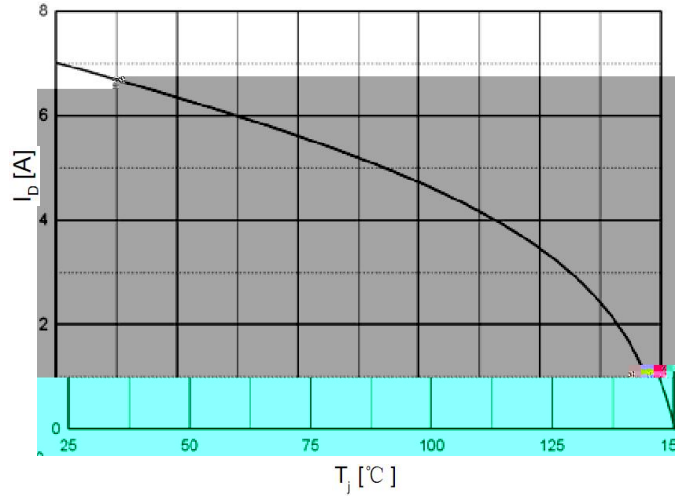

TO-220F Package Dimensions

:

