

FACE MOUNT CHO K BA IE EC IFIE		- 20 200 -5.0 A	
<p><b>DO-214AC/ MA</b></p> <p style="text-align: center;"><i>Dimensions in inches and (millimeters)</i></p>		<p><b>F</b></p> <p>◀ F</p> <p>◀ F</p> <p>◀ B - ,</p> <p>◀ L</p> <p>◀ H</p> <p>◀ H</p> <p>250°C/10</p> <p><b>M</b></p> <p>: M</p> <p>: M 2026</p> <p>: P</p> <p>: 0.0023 : A , 0.07</p> <p style="text-align: right;">L</p> <p style="text-align: right;">94 -0</p> <p style="text-align: right;">MIL- D-750,</p>	
<p>25°C</p> <p>20%.</p> <p style="text-align: right;">- 60H ,</p>			
		<p>MBOLC</p>	
M		20	40 60 80 100 150 200
M	M	14	28 42 56 70 105 140
M	DC	20	40 60 80 100 150 200
M	=100°C	I	5.0 A
P	, 8.3	I	120.0 A
M	5.0A		0.55 0.70 0.85 0.95
M	DC =25°C DC =125°C	I	0.5 0.05 50 10 mA
			80.0 °C/
O			-55 +150 °C
			-55 +150 °C

## Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

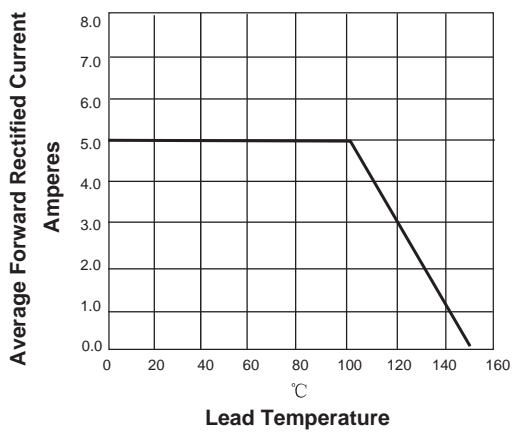


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

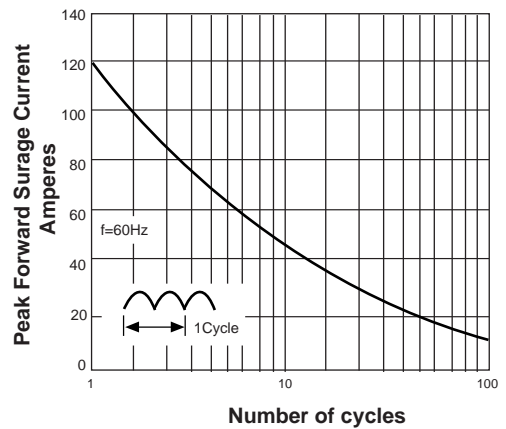


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

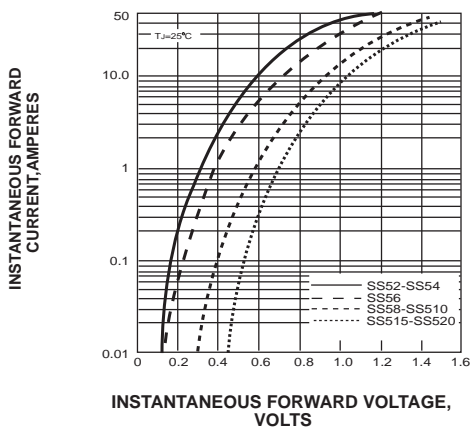


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

