



## Bridge Rectifiers

### Features

- UL recognition file number E230084
- Universal 3-way terminals snap-on wire wrap-around or PCB mounting
- High surge current capability



## KBPC50005(W) THRU KBPC5010(W)

---

### Ordering Information (Example)

PREFERED P/N	PACKAGE CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
KBPC50005~KBPC5010	A1	Approximate 24.5	50	50	500	Paper Box

KBPC50005W~KBPC5010W


---

---



# KBPC50005(W) THRU KBPC5010(W)

## Outline Dimensions

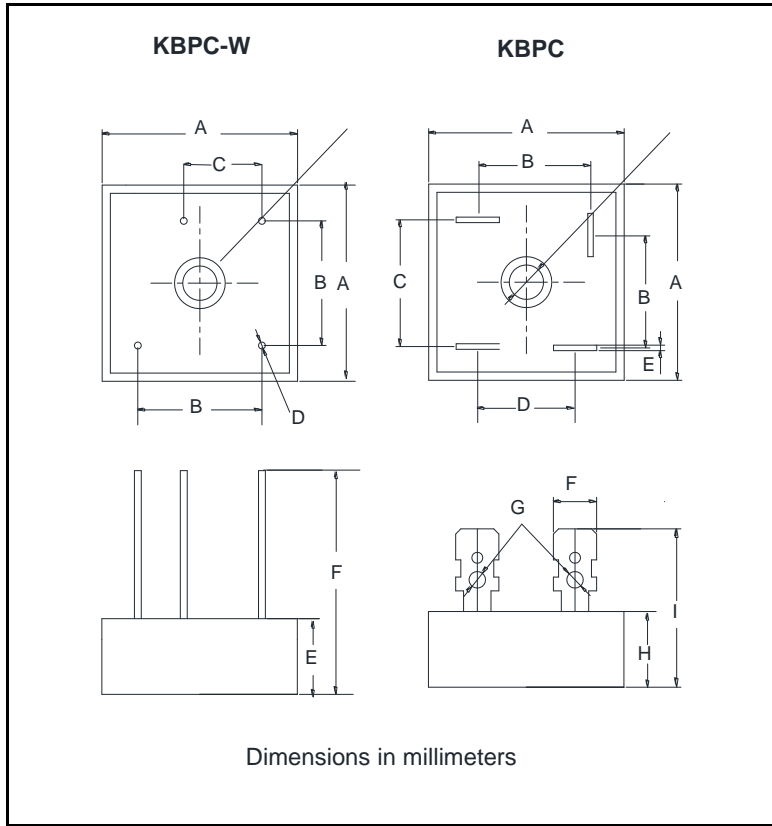

KBPC-W		
Dim	Min	Max
A	28.2	28.8